

Installing Dynotile could not be simpler...

Once the floor is prepared installation is simple and requires no sealant, adhesive or grout.




Position tiles so that one of the flat edges is in line with the door opening and the other follows the line of one side wall.



Align tiles so that the pegs line up with the loops. Holding the second tile at a slight angle enables the Overlock joint to locate.



Apply firm downward pressure toward the loop edge, and the tiles will snap firmly into place.

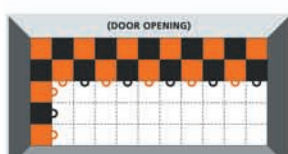

Proceed to snap the tiles into place until the two perimeter edges of your floor are laid.



Continue the installation adding one row at a time until your floor is complete. If cutting in of the floor to the back and opposite side wall is required tiles can be easily cut with hand or power saws.



Finally install the ramped edging across the door opening.

Congratulations! You now have a great looking floor that will last for years to come.

Full fixing instructions are available at www.dynotile.co.uk or experiment with your floor design by selecting the colours included within Dynotile's online Floorbuilder.

"I'm very pleased with the results.
Its really striking" **Mr A (Dutton Hill)**

Easy-Fit

Heavy duty PVC flooring system...

**NEW FROM
DYNOTILE**

for domestic or commercial use -
workshops, showrooms,
warehouses and exhibition stands.

- 450mm x 450mm (18" x 18") interlocking floor matting
- Made from shock resistant 7mm thick flexible PVC
- Uniform dove tail edges enable fast fitting on large areas
- Durable non-slip material with raised coin pattern surface
- Fits straight over all flat floors whether dusty or cracked

to order or for
further information;
Dynoline
01676 523386
or online @
www.dynotile.co.uk

**Save £££ on your order
by quoting this
promotion code:**

Available from Rockwell Sheet Sales Limited, Rockwell House,
Birmingham Road, Millisons Wood, Coventry, CV5 9AZ.




**MADE
IN THE
UK**


Dynotile is not just any floor covering, but a revolutionary new interlocking tile product designed to meet all your garage and concrete floor covering needs. Constructed and fashioned with the customer in mind, it represents the ultimate marriage of intelligent engineering and aesthetically pleasing design. The result: an extremely durable, simple to fit tile with a sophisticated showroom appearance.

The strong, insulated floor you can fit yourself in hours

- 📦 Simply Clips Together
- 📦 No Messy Adhesives
- 📦 Choice of Colours



To ensure the best connection possible, Dynotile uses Overlock technology. This exclusive technology utilises an interlocking, overlapping design for the most secure connection possible. This unique construction results in tighter seams, eliminating unsightly, dirt collecting gaps and reinforces water resistance.




Dynotile uses a honeycombed support structure engineered to provide the strength needed to withstand heavy loads. This structure also allows air to flow under the tiles to assist in the evaporation of unwanted moisture rising from the subsurface, and provides a valuable layer of insulation against the cold concrete below.



Made of a special rigid Polymer, Dynotile provides a unique blend of strength, shock absorption and durability whilst effectively resisting bacteria, chemicals and UV rays. The installation is simple and once finished Dynotiled garages instantly stand out from ones with cracked, dusty or peeling paint floors.

“It’s a great product! Easy to work with, quick, no mess and a wonderful end result” - Mr M (Chester)

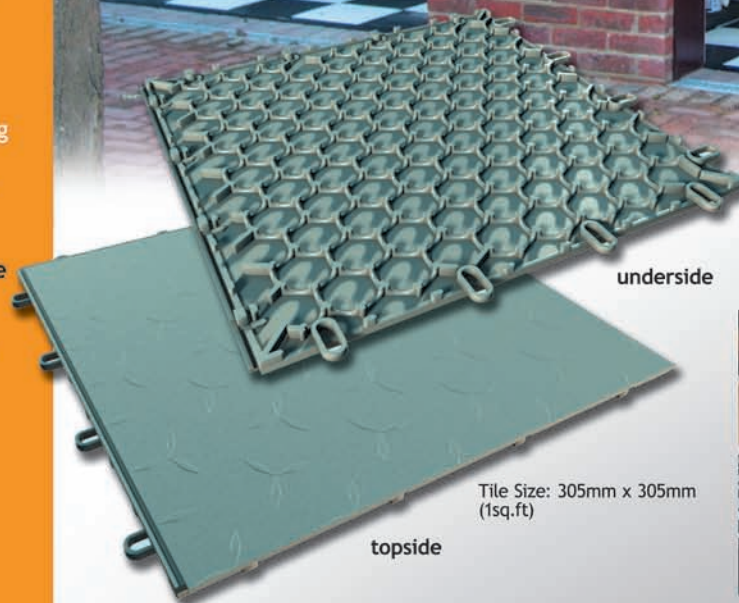


underside

Tile Size: 305mm x 305mm (1sq.ft)

topside

Both I and (more importantly) my wife are really pleased with the end result - Mr R (Nottingham)

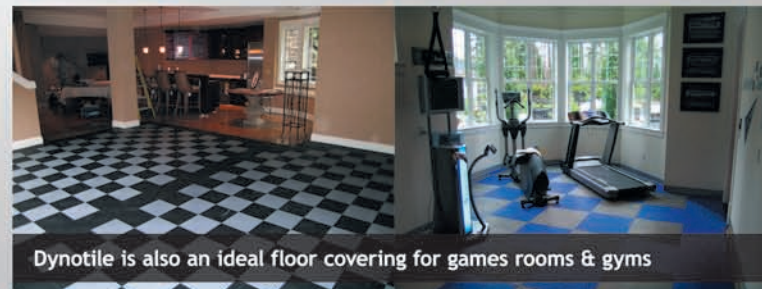

Dynotile is also an ideal floor covering for games rooms & gyms

Choice of 10 attractive colours - or choose your own colour on orders of over 500 Dynotiles

