


Sole UK Distributor Rockwell Sheet Sales Limited Rockwell House Birriningham Road Millisons Wood Coventry. CV5 9AZ Tel: 01676 523386 www.dynotile.co.uk



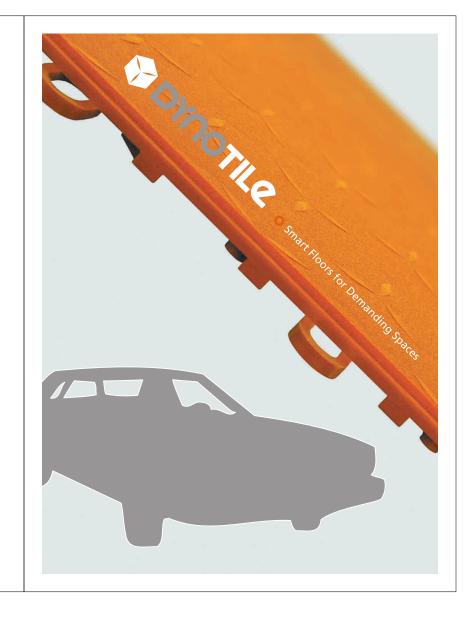


7. Color Selections

Dynotile is available in nine colors so now you can extend the décor of your home right into your garage, excercise room, or hobby room seamlessly, and with minimal effort. To add a custom look to any room, be sure and consider combining two, or even three colors.



To inquire about our product, ask us a question, or place an order please visit us on the web at **www.dynotile.co.uk** or call us on **01676 523386**. Dynotile and Overlock are trademarks of Innovative Material Handling, Inc. Patents Pending. ©2005. All rights reserved.



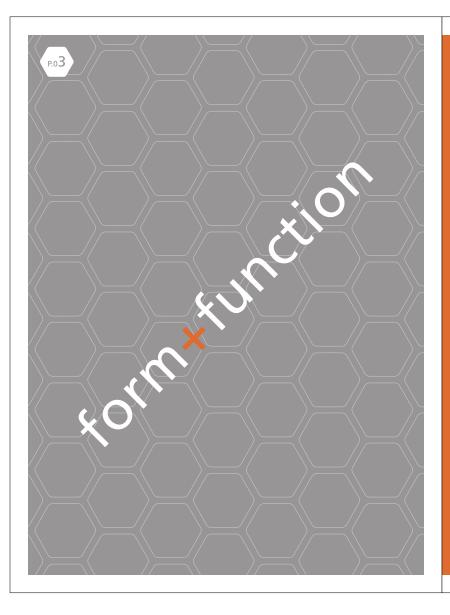

Design Advantage: Quick and Easy Installation


5. The 'Do-it-yourself' Tile

Dynotile does not require a professional to install and our unique Overlock technology makes installation go extremely fast. Simply align the pegs and loops, press firmly and you're onto the next tile. No glue. No adhesive. No floor surface preparation of any kind. Simply snap and go and in just a few hours you'll have a great looking floor that can be either permanent or temporary.

Installation Time Chart

Garage Size	Hours (1 person)
	2
	4
	6



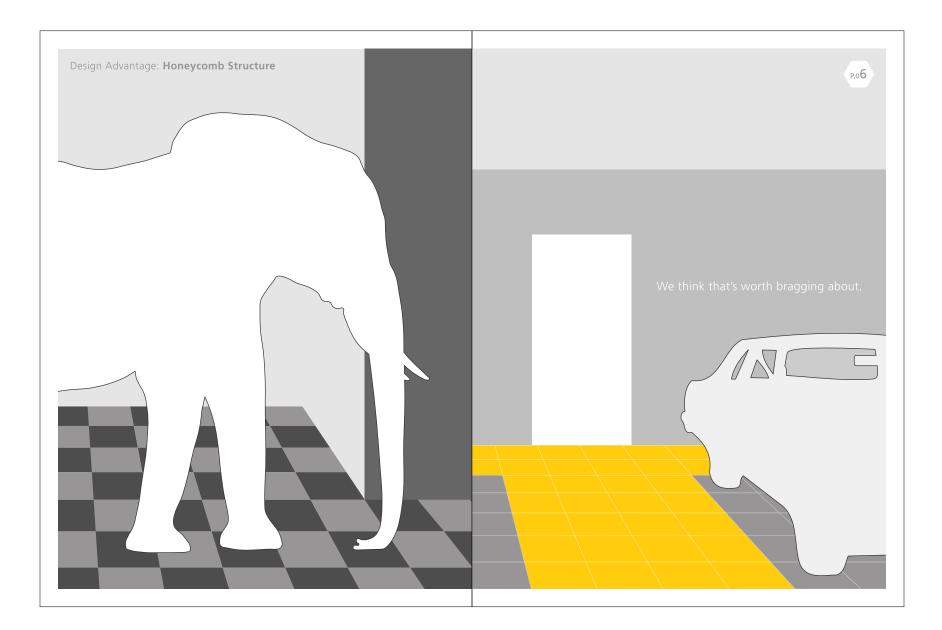

2. You Stand. We'll Do The Rest.

Design Advantage: Special Polymer Plastic

Dynotile is made of a special polymer plastic that provides you with a unique blend of strength and shock absorption properties. Our softer construction material is more forgiving on the feet and knees meaning you get a floor that is very comfortable to stand on. Yet, this unique polymer blend is also extremely tough, effectively resisting stains, fire, bacteria, chemicals, and the harmful effects of UV rays including fading and cracking.

P.08


Design Advantage: Versatility


1. We Think It's Pretty Cool Too

Dynotile is not only an ideal covering for any garage, it is also an ideal floor covering for any exercise, basement or hobby room, industrial warehouse, expo or tradeshow floor, outdoor deck or even an airplane hangar. It is also a great flooring solution if you are trying to cover up old, damaged or faded surfaces such as wood or linoleum.

3. Bring It On!

Underneath, Dynotile utilizes a unique honeycomb structure that provides the added strength needed to withstand those extra heavy loads. For floors that are cracked or damaged, Dynotile will hide any imperfections giving you a smooth flooring surface with a strong, manageable finish. The sides of the honeycomb also have radius tunnels that encourage airflow beneath the tiles. This unique design feature allows any trapped moisture that may come up through your concrete floor to evaporate.

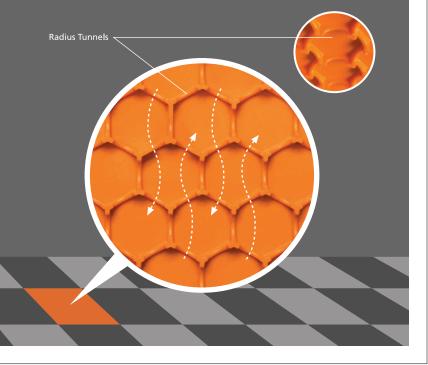

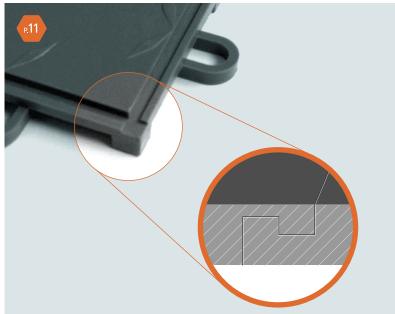

4. A Perfect Fit

Dynotile has been superbly engineered and is the only tile on the market featuring our patent pending Overlock[™] technology. This means you not only get tiles that fit together extremely tight, but they actually overlap to create a near impenetrable seam. Dirt and spills tend to stay on top of the tiles and do not seep down between the seams where connection points are typically weak. Cleanups are quick and easy so you can keep your garage smelling fresh with no lingering odors.

Design Advantage: Overlock Technology

This is Dynotile. Not just any garage floor covering, but a revolutionary new tile product designed to meet all your garage and concrete floor covering needs. Constructed and fashioned with you in mind, it represents the ultimate marriage of intelligent engineering with aesthetically pleasing design. The result: an extremely durable tile with a sophisticated showroom appearance that acts as a layer of insulation, keeping your feet and stored items away from the harsh properties of the concrete below. Dynotile is, in essence, the perfect combination of form and function and can give a fresh, clean look to any room, quickly and easily.

P.13

Use our specially designed edging to create a smooth transition between rooms or to the outdoors

304.8mm x 44.5mm x 9.5mm

6. Design Specifications

Size	304.8mm x 304.8mm x 9.5mm
Connection	Overlock Interlocking Overlap
Material	Specially Formulated Polymer*

*chemically resistant per ASTM 925

```
Design Advantage: Light and Easy-to-handle
```

